


LM...L

加長型(公制規格)

Long Type Series(Metric Dimension)

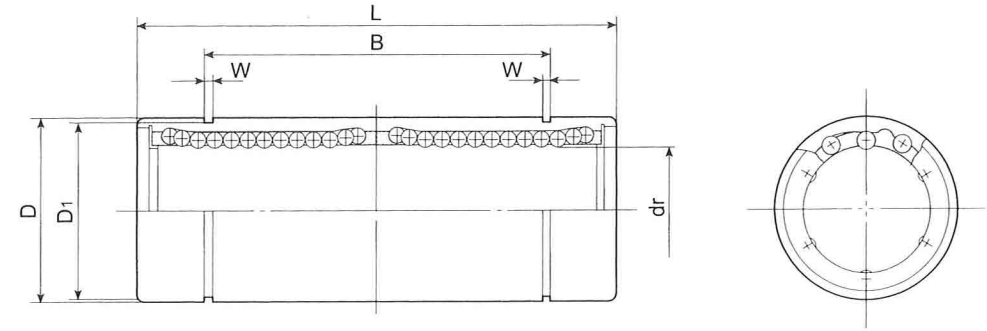

軸徑 Nominal shaft diameter mm	型號 Model No. LM...L LM...LUU	鋼珠 條數 Ball circuit	重量 Weight g	主要尺寸及精度				
				mm	dr		mm	D
					公差 Tolerance μm	公差 Tolerance μm		
6	LM 6L LM 6LUU	4	16	6		12	0	
8	LM 8L LM 8LUU	4	31	8		15	-13	
10	LM 10L LM 10LUU	4	62	10	0	19		
12	LM 12L LM 12LUU	4	80	12	-10	21	0	
13	LM 13L LM 13LUU	4	90	13		23	-16	
16	LM 16L LM 16LUU	4	145	16		28		
20	LM 20L LM 20LUU	5	180	20	0	32	0	
25	LM 25L LM 25LUU	6	440	25	-12	40	-19	
30	LM 30L LM 30LUU	6	480	30		45		
35	LM 35L LM 35LUU	6	795	35	0	52	0	
40	LM 40L LM 40LUU	6	1,170	40	-15	60	-22	
50	LM 50L LM 50LUU	6	3,100	50		80		
60	LM 60L LM 60LUU	6	3,500	60	0 -20	90	0 -25	

Main dimensions and tolerance						偏心 Eccentricity	基本定格荷重 Basic load rating		
mm	L 公差 Tolerance μm	mm	B 公差 Tolerance μm	W mm	D1 mm		動定格 dynamic C(kgf)	靜定格 static Co(kgf)	
45		35		1.1	14.3	44	80	8	
55		44		1.3	18	60	112	10	
57	0 -300	46	0 -300	1.3	20	83	160	12	
61		46		1.3	22	83	160	13	
70		53		1.6	27	125	240	16	
80		61		1.6	30.5	143	280	20	
112		82		1.85	38	159	320	25	
123		89		1.85	43	254	560	30	
135	0 -400	99	0 -400	2.1	49	270	640	35	
151		121		2.1	57	350	820	40	
192		148		2.6	76.5	620	1,620	50	
209		170		3.15	86.5	770	2,040	60	