



# SGL-C

## 鋼片 / 夾緊式 / 撓性聯軸器 COUPLING / DISK CLAMP TYPE

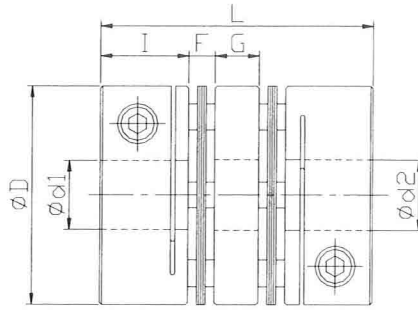

### 尺寸 / Dimension

單位 / Unit : mm

Catalog Number 型號	D	I	F	G	L	H	M	d1xd2 標準孔徑 公差 (H8)		Mass** 質量 (g)
								Min	Max	
<b>SGL-27C</b>	27	10.5	2.3	6	32	9	M3	5	10	33
<b>SGL-34C</b>	34	12	2.6	7	36	12	M3	6	14	58
<b>SGL-40C</b>	40	15	4.8	9	48	13.5	M4	8	16	128
<b>SGL-50C</b>	50	20	5	11	61	18	M5	10	18	300
<b>SGL-65C</b>	65	24	6.5	13	74	23	M6	12	28	545

### 性能 / Function

Catalog Number 型號	Rated Torque 一般扭力 (N.m)	Max. Torque 最大扭力 (N.m)	Max. Rotational Frequency 最高回轉數 (min <sup>-1</sup> )	Moment* of Inertia 慣性 (kg · m <sup>2</sup> )	Errors of Eccentricity 容許偏心 (mm)	Errors of Shaft End-Play 容許軸向位差 (mm)	Errors of Angularity 容許偏角 (°)
<b>SGL-27C</b>	1.5	3	10000	3.0x10 <sup>-6</sup>	0.15	±0.33	2.0
<b>SGL-34C</b>	3	6	10000	10.5x10 <sup>-6</sup>	0.17	±0.4	2.0
<b>SGL-40C</b>	7	14	10000	26.4x10 <sup>-6</sup>	0.23	±0.5	2.0
<b>SGL-50C</b>	12.5	25	10000	135.0x10 <sup>-6</sup>	0.23	±0.8	2.0
<b>SGL-65C</b>	22.5	55	10000	360.0x10 <sup>-6</sup>	0.28	±0.9	2.0

材質 / Material: 鋁合金 / Aluminum alloy

### 特性 / Features

1. 高剛性 / High-rigid.
2. 扭力大 / High torque.
3. 低慣性 / Low inertia.
4. 零背隙 / Zero backlash.
5. 偏角大 / High angularity.
6. 適用小型伺服傳動 / It fits of small servo transmission.
7. 緩衝材：不銹鋼彈片 / Buffer Material: SUS disk.
8. 固定方式：夾緊式 / Fixed mode: Clamp type.

型號表示 / Product NO:

**SGL-40C - Ø8xØ8**

型號 / Type

孔徑 / Inside dia