
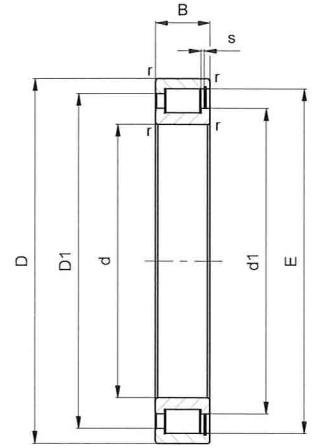


Series
NCF 18xx.V

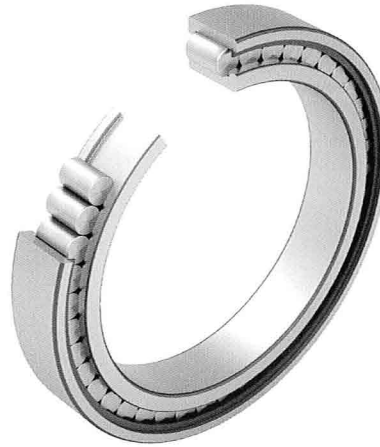

description	weight [kg]	measures [mm]								load ratings		fatigue limit load	limiting speed
		d	D	B	r min.	E	d ₁ ca.	D ₁ ca.	s ^{''}	dyn. C _r [kN]	stat. C _{0r} [kN]	C _{0r} [kN]	n _G [min ⁻¹]
NCF1830V	1,3	150	190	20	1,1	179,5	163	176	1,5	108	197	19,4	1900
NCF1832V	1,4	160	200	20	1,1	189	173	185	1,5	112	209	20	1800
NCF1834V	1,8	170	215	22	1,1	203,8	184,5	199,5	1,5	149	272	27,3	1700
NCF1836V	1,9	180	225	22	1,1	215,2	196	211	1,5	154	290	28,3	1600
NCF1838V	2,4	190	240	24	1,5	229	208	224	1,8	176	330	31,5	1500
NCF1840V	2,6	200	250	24	1,5	237,5	218	231	1,8	179	343	33	1400
NCF1844V	2,8	220	270	24	1,5	258	238	252	1,8	188	377	35,5	1200
NCF1848V	4,4	240	300	28	2	287	263	279	1,8	264	520	49,5	1100
NCF1852V	4,7	260	320	28	2	307,2	283	299	1,8	275	561	52,5	1000
NCF1856V	7,1	280	350	33	2	334	307	325	2,5	335	682	64	950
NCF1860V	10	300	380	38	2,1	363	331	353	3	428	858	79	850
NCF1864V	10,5	320	400	38	2,1	383	351	373	3	442	912	82	800
NCF1868V	11	340	420	38	2,1	403	371	393	3	455	966	86	750
NCF1872V	11,5	360	440	38	2,1	423	391	413	3,5	468	1020	92	700
NCF1876V	19,5	380	480	46	2,1	457,5	415,5	447,5	3,5	651	1360	122	670
NCF1880V	20,5	400	500	46	2,1	474	432	464	3,5	664	1420	127	630
NCF1884V	21	420	520	46	2,1	499	457	489	3,5	684	1500	131	600
NCF1888V	22	440	540	46	2,1	515,5	473,5	505,5	3,5	697	1560	134	560
NCF1892V	34	460	580	56	3	553	501	541	5	945	2020	171	530
NCF1896V	35,5	480	600	56	3	573,5	522	561	5	965	2100	180	500
NCF18/500V	36,5	500	620	56	3	594	542	582	5	985	2190	179	480
NCF18/530V	38,5	530	650	56	3	624,5	573	612	5	1010	2320	184	450
NCF18/560V	40,5	560	680	56	3	655	603	643	5	1040	2440	190	430
NCF18/600V	51,5	600	730	60	3	696	644	684	7	1080	2610	200	400
NCF18/630V	72,5	630	780	69	4	737	677	725	8	1290	3080	235	360
NCF18/670V	76,5	670	820	69	4	783	725	769	8	1340	3290	250	340
NCF18/710V	92,5	710	870	74	4	831,5	767,5	815,5	8	1590	3890	290	320
NCF18/750V	110	750	920	78	5	880	811	863	8	1790	4380	320	300
NCF18/800V	130	800	980	82	5	935,5	862,5	918,5	9	1970	4890	350	280
NCF18/850V	135	850	1030	82	5	985,5	911	969	9	2090	5290	375	260
NCF18/900V	160	900	1090	85	5	1044	966	1026	9	2280	5880	405	240
NCF18/950V	185	950	1150	90	5	1103,5	1021,5	1085,5	10	2490	6500	450	220
NCF18/1000V	230	1000	1220	100	6	1165	1073	1145	12	2980	7690	465	200

¹⁾ axial displacement facility from central position