


idc

Series
NNC 48xx.V

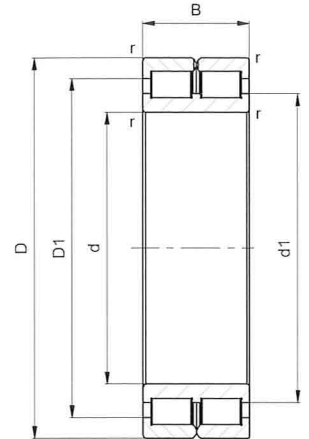

description	weight [kg]	measures [mm]						load ratings		fatigue limit load	limiting speed
		d	D	B	r min.	d ₁ ca.	D ₁ ca.	dyn. C _r [kN]	stat. C _{0r} [kN]	C _{0r} [kN]	n _G [min ⁻¹]
NNC4830V	2,9	150	190	40	1,1	165	174	234	575	58	1910
NNC4832V	3,1	160	200	40	1,1	176,5	185,5	243	616	61	1800
NNC4834V	4,1	170	215	45	1,1	186,5	197	265	651	64	1680
NNC4836V	4,3	180	225	45	1,1	196	206,5	272	685	67	1600
NNC4838V	5,7	190	240	50	1,5	208,5	220,5	314	784	77	1510
NNC4840V	5,9	200	250	50	1,5	219	231	322	825	80	1440
NNC4844V	6,4	220	270	50	1,5	240	252	338	906	85	1320
NNC4848V	10	240	300	60	2	260	277	506	1310	124	1200
NNC4852V	11	260	320	60	2	282	299	529	1430	132	1120
NNC4856V	16	280	350	69	2	307,5	326,5	691	1890	173	1030
NNC4860V	23	300	380	80	2,1	328	350	810	2170	196	950
NNC4864V	24	320	400	80	2,1	351	373	840	2330	207	900
NNC4868V	25,5	340	420	80	2,1	368,5	390,5	861	2450	215	850
NNC4872V	27	360	440	80	2,1	391,5	413,5	889	2600	225	810
NNC4876V	46	380	480	100	2,1	419,5	447,5	1300	3660	315	750
NNC4880V	48	400	500	100	2,1	434	462	1330	3790	325	720
NNC4884V	50	420	520	100	2,1	456	484	1360	3990	315	690
NNC4888V	52	440	540	100	2,1	478	506	1400	4180	320	660
NNC4892V	76	460	580	118	3	504	534	1570	4680	330	630
NNC4896V	79	480	600	118	3	528	558	1610	4900	350	600
NNC48/500V	82	500	620	118	3	544	574	1640	5060	380	580
NNC48/530V	86	530	650	118	3	576	606	1690	5360	390	550