


idc

Series
NNC 49xx.V

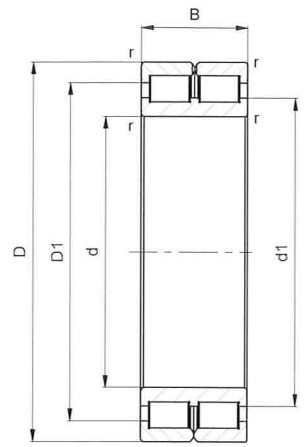

description	weight [kg]	measures [mm]						load ratings		fatigue limit load	limiting speed
		d	D	B	r min.	d _i ca.	D ₁ ca.	dyn. C _r [kN]	stat. C _{0r} [kN]	C _{0r} [kN]	n ₆ [min ⁻¹]
NNC4912V	0,49	60	85	25	1	70	76	75	133	15,7	4450
NNC4914V	0,78	70	100	30	1	81,5	89	107	198	23,5	3800
NNC4916V	0,88	80	110	30	1	90,5	98	113	220	26	3400
NNC4918V	1,4	90	125	35	1,1	103	112	152	307	36	3000
NNC4920V	2	100	140	40	1,1	116	126	194	400	45	2700
NNC4922V	2,2	110	150	40	1,1	124,5	134,5	202	431	47	2490
NNC4924V	3	120	165	45	1,1	138,5	149,5	226	479	52	2270
NNC4926V	4	130	180	50	1,5	149	161	262	554	60	2090
NNC4928V	4,2	140	190	50	1,5	159,5	171,5	272	595	63	1960
NNC4930V	6,7	150	210	60	2	171,5	186,5	389	858	87	1800
NNC4932V	7	160	220	60	2	183,5	199	404	922	92	1710
NNC4934V	7,4	170	230	60	2	192	207,5	414	965	95	1620
NNC4936V	10,8	180	250	69	2	205,5	224,5	557	1240	126	1510
NNC4938V	11,2	190	260	69	2	215,5	234,5	572	1310	132	1440
NNC4940V	15,8	200	280	80	2,1	231	253	671	1510	153	1350
NNC4944V	17,2	220	300	80	2,1	248	270	697	1630	160	1250
NNC4948V	18,5	240	320	80	2,1	271	293	731	1780	171	1160
NNC4952V	32	260	360	100	2,1	295	323	1080	2540	243	1050
NNC4956V	34	280	380	100	2,1	317	345	1120	2740	255	980
NNC4960V	53	300	420	118	3	343,5	379,5	1560	3660	350	900
NNC4964V	56	320	440	118	3	362	398	1610	3860	365	850
NNC4968V	59	340	460	118	3	380,5	416,5	1650	4070	380	810
NNC4972V	62	360	480	118	3	399	435	1700	4270	395	770
NNC4976V	92,5	380	520	140	4	430	470	2210	5750	505	720
NNC4980V	96,5	400	540	140	4	450,5	490,5	2270	6030	525	690
NNC4984V	99,5	420	560	140	4	471	511	2330	6310	550	660
NNC4988V	137	440	600	160	4	500	548	2980	7540	565	630
NNC4992V	140	460	620	160	4	513	561	3020	7740	575	600
NNC4996V	165	480	650	170	5	538,5	589	3310	8560	710	570
NNC49/500V	175	500	670	170	5	565,5	616	3400	9000	745	550
NNC49/530V	200	530	710	180	5	589	646	3820	9910	810	520