


idc

Series NNCF 48xx.V

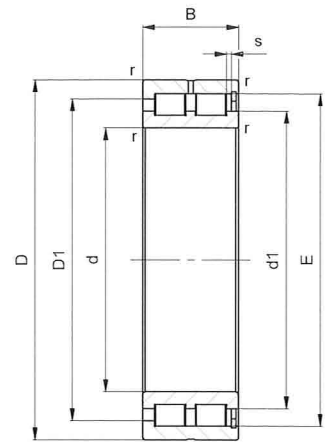

description	weight [kg]	measures [mm]								load ratings		fatigue limit load	limiting speed
		d	D	B	r min.	E	d ₁ ca.	D ₁ ca.	s ¹⁾	dyn. C _r [kN]	stat. C _{0r} [kN]	C _{0r} [kN]	n _G [min ⁻¹]
NNCF4830V	2,9	150	190	40	1,1	178,6	165	174	2	234	575	58	1910
NNCF4832V	3,1	160	200	40	1,1	190,1	176,5	185,5	2	243	616	61	1800
NNCF4834V	4,1	170	215	45	1,1	201,7	186,5	197	3	265	651	64	1680
NNCF4836V	4,3	180	225	45	1,1	211,3	196	206,5	3	272	685	67	1600
NNCF4838V	5,7	190	240	50	1,5	225,4	208,5	220,5	4	314	784	77	1510
NNCF4840V	5,9	200	250	50	1,5	236	219	231	4	322	825	80	1440
NNCF4844V	6,4	220	270	50	1,5	257	240	252	4	338	906	85	1320
NNCF4848V	10	240	300	60	2	282,4	260	277	4	506	1310	124	1200
NNCF4852V	11	260	320	60	2	304,7	282	299	4	529	1430	132	1120
NNCF4856V	16	280	350	69	2	332,9	307,5	326,5	4	691	1890	173	1030
NNCF4860V	23	300	380	80	2,1	357,3	328	350	6	810	2170	196	950
NNCF4864V	24	320	400	80	2,1	380,2	351	373	6	840	2330	207	900
NNCF4868V	25,5	340	420	80	2,1	397,4	368,5	390,5	6	861	2450	215	850
NNCF4872V	27	360	440	80	2,1	420,4	391,5	413,5	6	889	2600	225	810
NNCF4876V	46	380	480	100	2,1	456,4	419,5	447,5	6	1300	3660	315	750
NNCF4880V	48	400	500	100	2,1	471,1	434	462	6	1330	3790	325	720
NNCF4884V	50	420	520	100	2,1	493,1	456	484	6	1360	3990	315	690
NNCF4888V	52	440	540	100	2,1	515,1	478	506	6	1400	4180	320	660
NNCF4892V	76	460	580	118	3	543,9	504	534	7	1570	4680	330	630
NNCF4896V	79	480	600	118	3	567,8	528	558	7	1610	4900	350	600
NNCF48/500V	82	500	620	118	3	583,8	544	574	7	1640	5060	380	580
NNCF48/530V	86	530	650	118	3	615,7	576	606	7	1690	5360	390	550

¹⁾ axial displacement facility from central position